

6 Burner Built-In and Hood

GAS ON GLASS

PRODUCT CODE: **EAL1200RBQ**




FEATURES:

- + 6 gas burner unit with rear burner
- + 1 infrared rear burner
- + Rotisserie set and 10 amp plug in motor
- + 304 grade stainless steel finish
- + 304 grade stainless steel tube burners
- + 430 grade stainless steel flame tamers
- + 2 cast iron cooking grills
- + 1 reversible cast iron griddle plate
- + 1 stainless steel warming rack
- + Easy removable drip tray
- + Push button battery ignition
- + Control knob (blue lighting)
- + Side heat deflectors (built-in use)
- + LPG jets fitted
- + Natural Gas compatible (refer to manual for instructions)
- + BBQ cover included

SPECIFICATIONS:

Cooking Area Dim.	W960mm x D455mm
Lid Type	Hood
No. of Burners	6
Plate and Grill	Cast Iron
Weight	69.0kg gross / 62.0kg net
Total Gas Consumption	90.5 MJ/h LPG / 79.0 MJ/h natural
Main Burners Gas Consumption	13.0 MJ/h LPG / 11.0 MJ/h natural
Infrared Burner	12.5 MJ/h LPG / 13.0 MJ/h natural
Barcode	9347726004075

INSTALLATION DIAGRAM

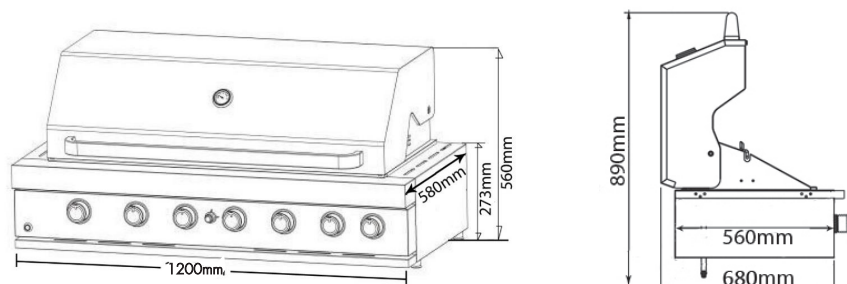

alfresco range



Warranty

CONVERSION INFORMATION

Natural Gas compatible - please refer to instruction manual. All first-fix connections will require a licensed gas plumber to connect and certify the appliances

ACCESSORY INFORMATION

Natural Gas hose and regulator sold separately
Product Code: EALNGCK

CLEANING AND MAINTENANCE

- Cleaning operations must only be carried out when the appliance is completely cool.
- Clean the appliance regularly, preferably after each use
- Abrasive cleaners or sharp object will damage the appliance surface; you should clean it using water and a little washing up liquid

INSTALLATION INFORMATION

WARNING

These BBQ's are only to be used outdoors, they must not be used indoors. If storing indoors, remove the gas cylinder. The BBQ can be used/installed in an alfresco area in accordance with the following: Alfresco area must comply with the definition of an outdoor area in AS4557:2004 clause 1.2.46 - Natural gas BBQ's must be installed only by an authorized person- Clearances to combustible materials must be maintained. - If installed below a rangehood, the minimum distance from the cooking grid/plate to the rangehood is 1200mm: Refer to instruction manual for further details.