


Dimensions/Weight

Overall Dimensions (mm):	175(h) x 600(w) x 300(d) (450d extended)
Duct Diameter (mm):	120mm
Weight:	12kg

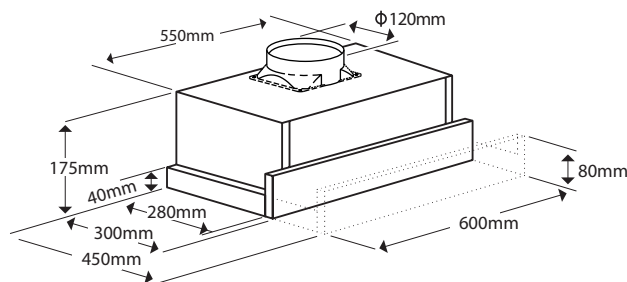

Technical Details

Style

Rangehood Type:	Slide-out
Category Size:	60cm

Functionality

Extraction Type:	Ducted or Front Recirculating
Extraction Rate:	378m ³ /hr Net 440m ³ /hr
Number of Motors:	2
Watts of Motor:	100w
Speeds:	3
Filtration:	2 x Aluminium Mesh
Lights:	2 x 2W LED*
dBA Rating:	47-56dBA

Accessories

Charcoal Filter:	Included (ORCF110)
Fascia Panel:	40mm + 80mm Included

Installation

Maximum Current:	10amps 2 Pin Plug
Connection:	240V, 50Hz
Installation Type	Built Into Overhead Cabinetry

Warranty:	24 Months Parts & Labour
-----------	--------------------------

Aesthetics

Finish:	White Body and Stainless Steel Panel
Front Rail:	Yes 80mm
Control Type:	Concealed Sliding Switch

Key Features



Charcoal Filters

Carbon filters do a superior job of cleaning the air before it re-enters the kitchen, ensuring your kitchen will be smelling fresh.



Front Recirculation

A recirculating rangehood draws the air inside the appliance, cleans it and pushes it through the front panel. Because there is no ducting required, these rangehoods are very easy to install.



LED Light

LED lights use a small amount of energy, generate little heat and last a long time. Not only are they cost effective, they will ensure your cooktop is well lit.

*Stock produced from July 2020.

Customer Care

T: 1300 739 033 (AU) 09 415 6000 (NZ)
E: customercare@omegaaappliances.com.au customercare@monacocorp.co.nz

Updated 30/01/2020 - V1

NB: Drawings are not to scale - they are to assist only.
WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.