




## Dimensions/Weight

Overall Dimensions (mm):	175(h) x 900(w) x 300(d) (450d extended)
Duct Diameter (mm):	120mm
Weight:	12kg

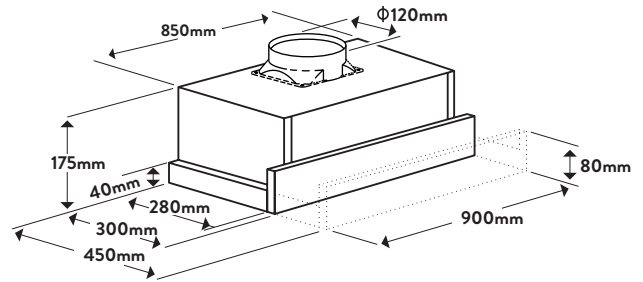

## Technical Details

### Style

Rangehood Type:	Slide-out
Category Size:	90cm

### Functionality

Extraction Type:	Ducted or Front Recirculating
Extraction Rate:	352m <sup>3</sup> /hr Net 440m <sup>3</sup> /hr Gross
Number of Motors:	2
Watts of Motor:	100w
Speeds:	3
Filtration:	2 x Aluminium Mesh
Lights:	2 x 2W LED
dBA Rating:	47-57dBA

### Accessories

Charcoal Filter:	Included (ORCF110)
Fascia Panel:	40mm + 80mm Included

### Installation

Maximum Current:	10amps 2 Pin Plug
Connection:	240V, 50Hz
Installation Type:	Built Into Overhead Cabinetry

Warranty:	24 Months Parts & Labour
-----------	--------------------------

## Aesthetics

Finish:	White Body and Stainless Steel Panel
Front Rail:	Yes 80mm
Control Type:	Concealed Sliding Switch

## Key Features



### Charcoal Filters

Carbon filters do a superior job of cleaning the air before it re-enters the kitchen, ensuring your kitchen will be smelling fresh.



### Front Recirculation

A recirculating rangehood draws the air inside the appliance, cleans it and pushes it through the front panel. Because there is no ducting required, these rangehoods are very easy to install.



### LED Light

LED lights use a small amount of energy, generate little heat and last a long time. Not only are they cost effective, they will ensure your cooktop is well lit.

## Customer Care

T: 1300 739 033 (AU) 09 415 6000 (NZ)  
E: [customercare@omegaappliances.com.au](mailto:customercare@omegaappliances.com.au) [customercare@monacocorp.co.nz](mailto:customercare@monacocorp.co.nz)

Updated 30/01/2020 - V1

NB: Drawings are not to scale - they are to assist only.  
WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.