


Econoflush Unframed Concealed Inwall Cistern Installation Instructions




PRODUCT CODE J2981

Main installation components

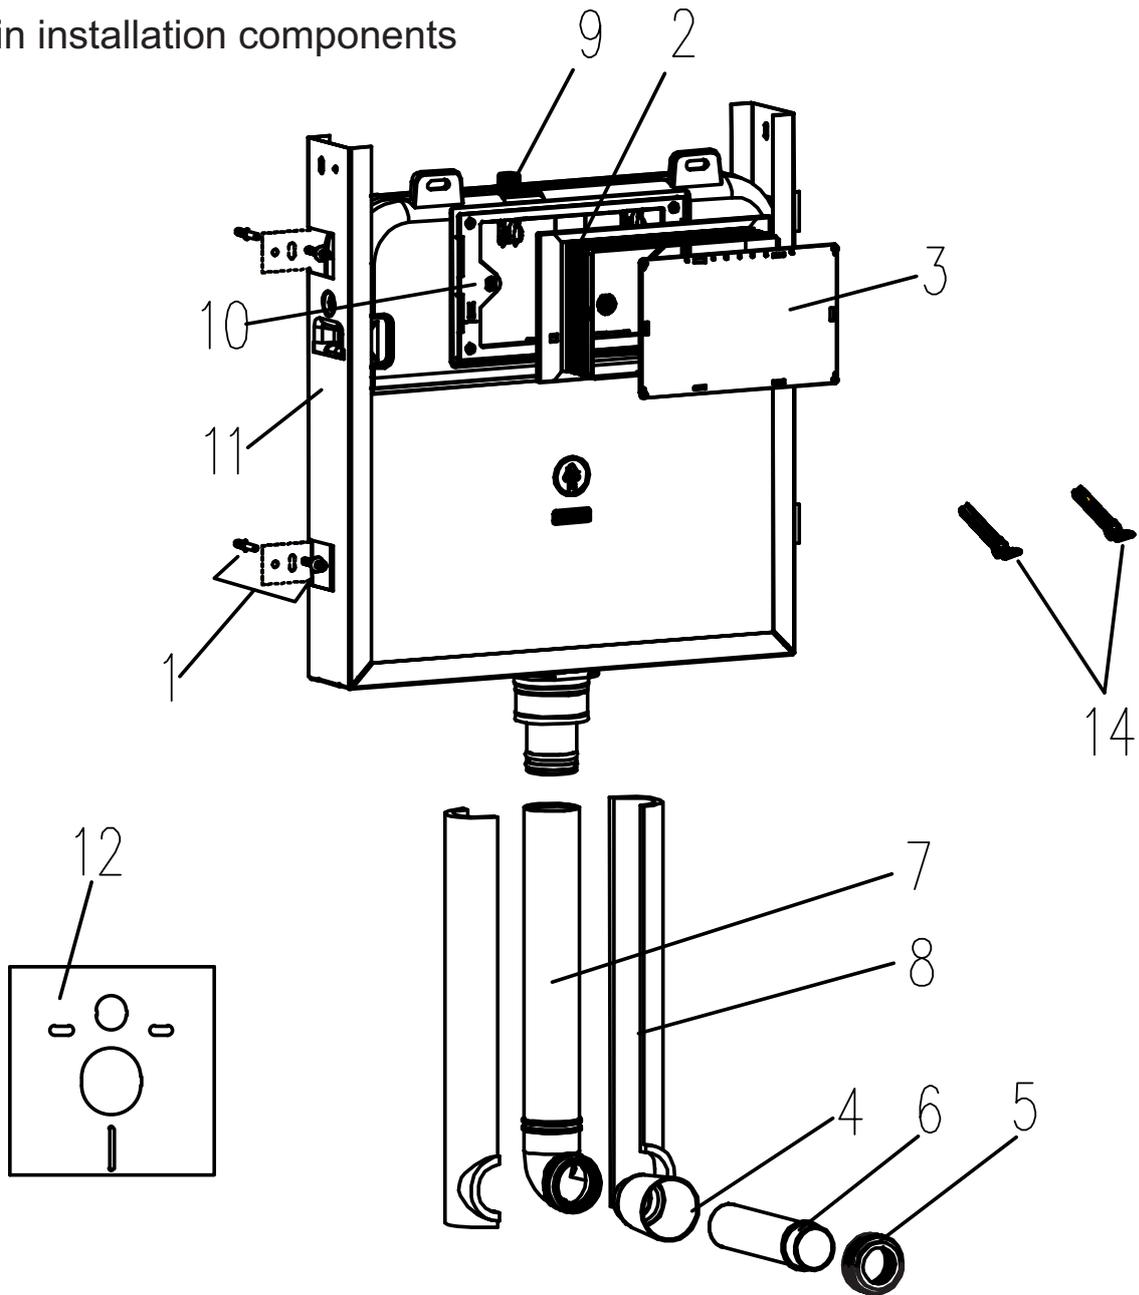


No.	Description	Item code	Qty
1	Mounting screw	XJ167	4
2	Plastic plug		1
3	Button box		1
4	Flush pipe plug		1
5	Rubber keeseal		1
6	Flush pipe		1
7	Cistern outlet pipe		XJ167A
8	Outlet pipe cover	2	
9	Water supply valve	XJ166C	1
10	Mounting box bracket	XJ166D	1
11	Metal support frame		1
12	Liner		1
13	Fixing rod	XJ166G	2

1. General dimension and water supply drawing

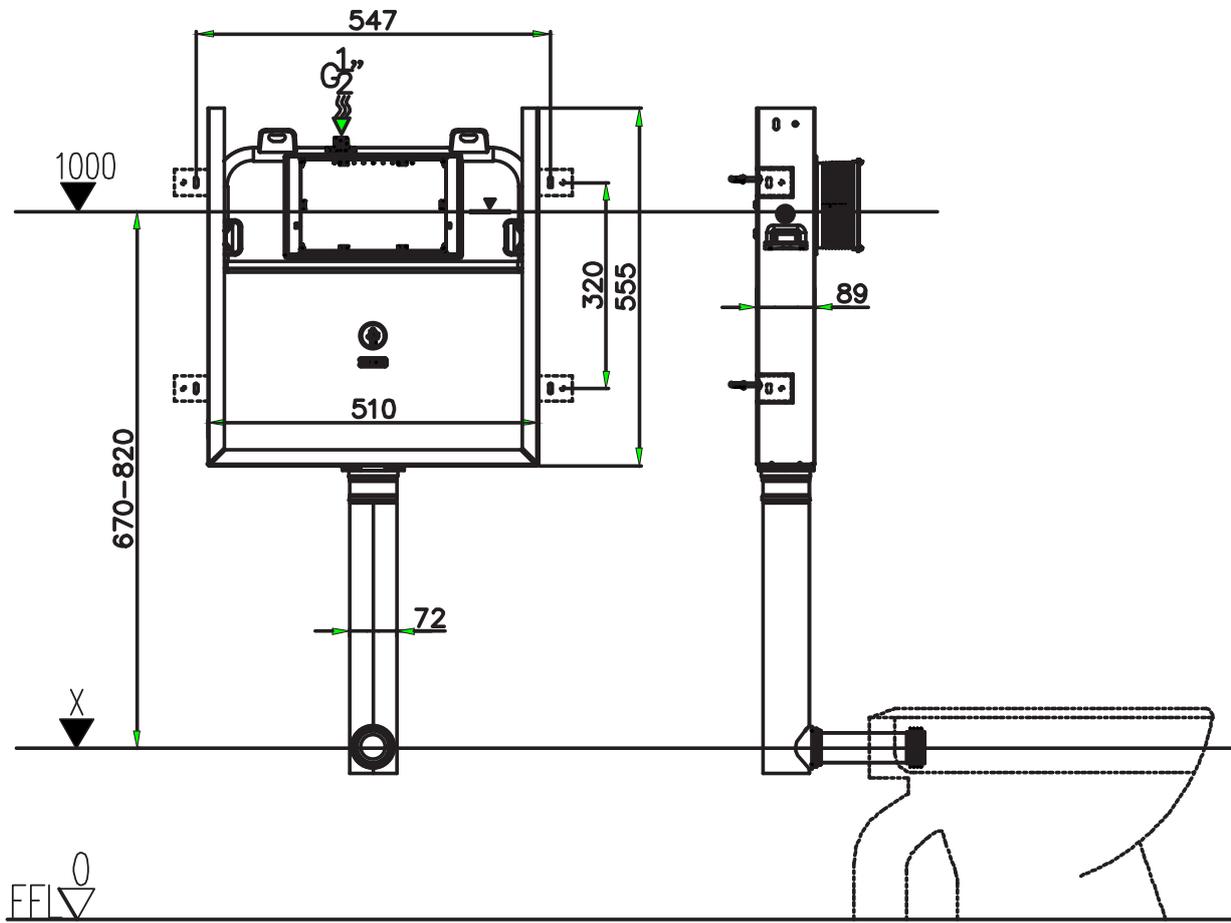


2. Drill the mounting screw holes


The hole dimensions shown are nominal.
Use the frame itself as the hole location guide.

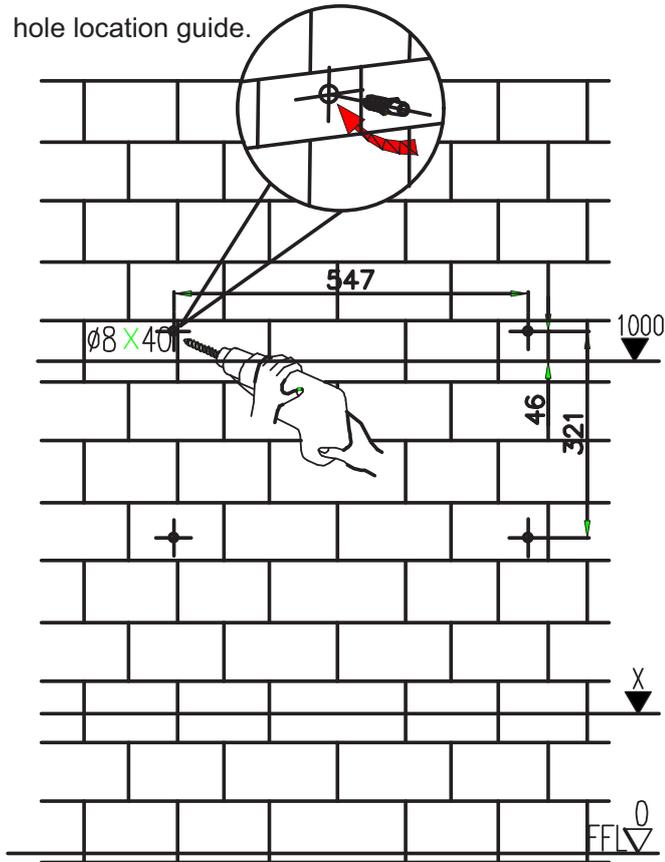


3. Wall-mounting of cistern

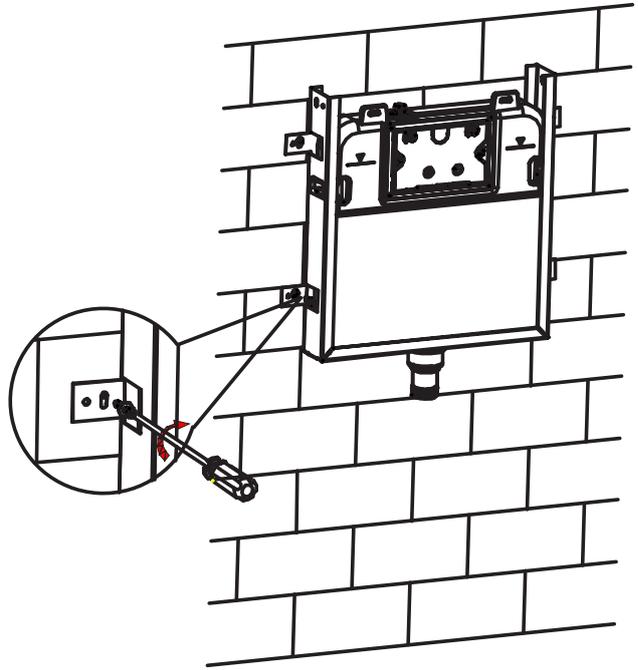


3. Timber frame cistern mounting

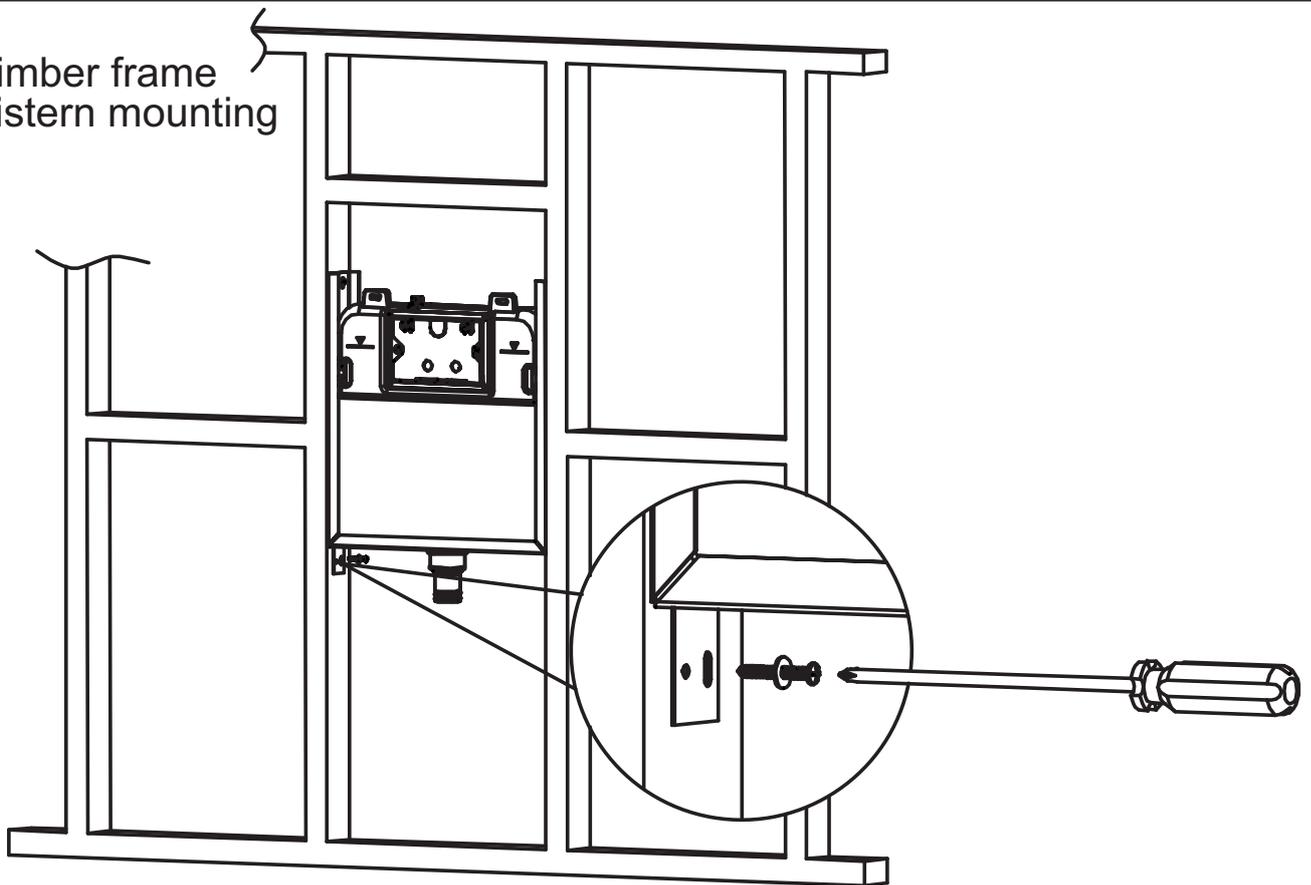



4. Installation of cistern outlet pipe

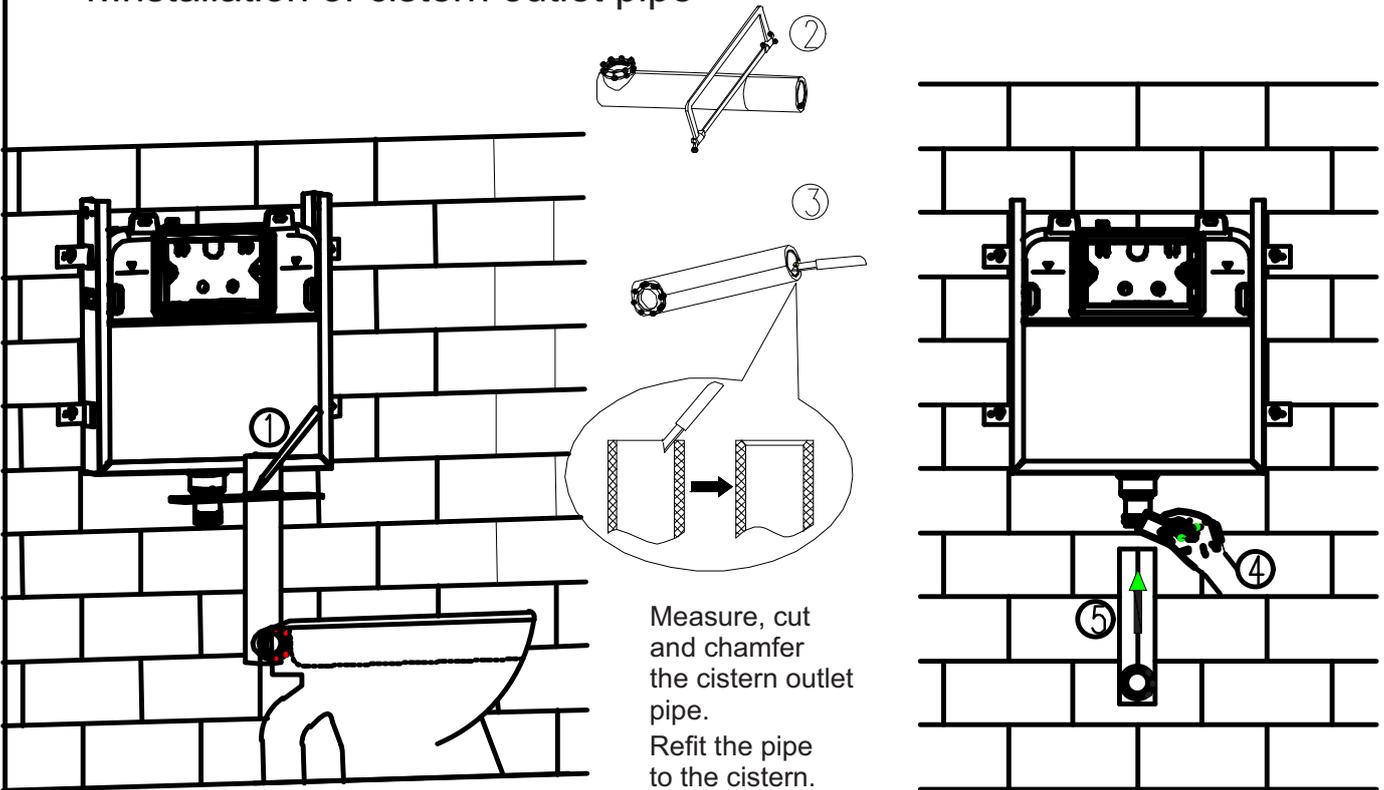


5. Mounting of installation accessories

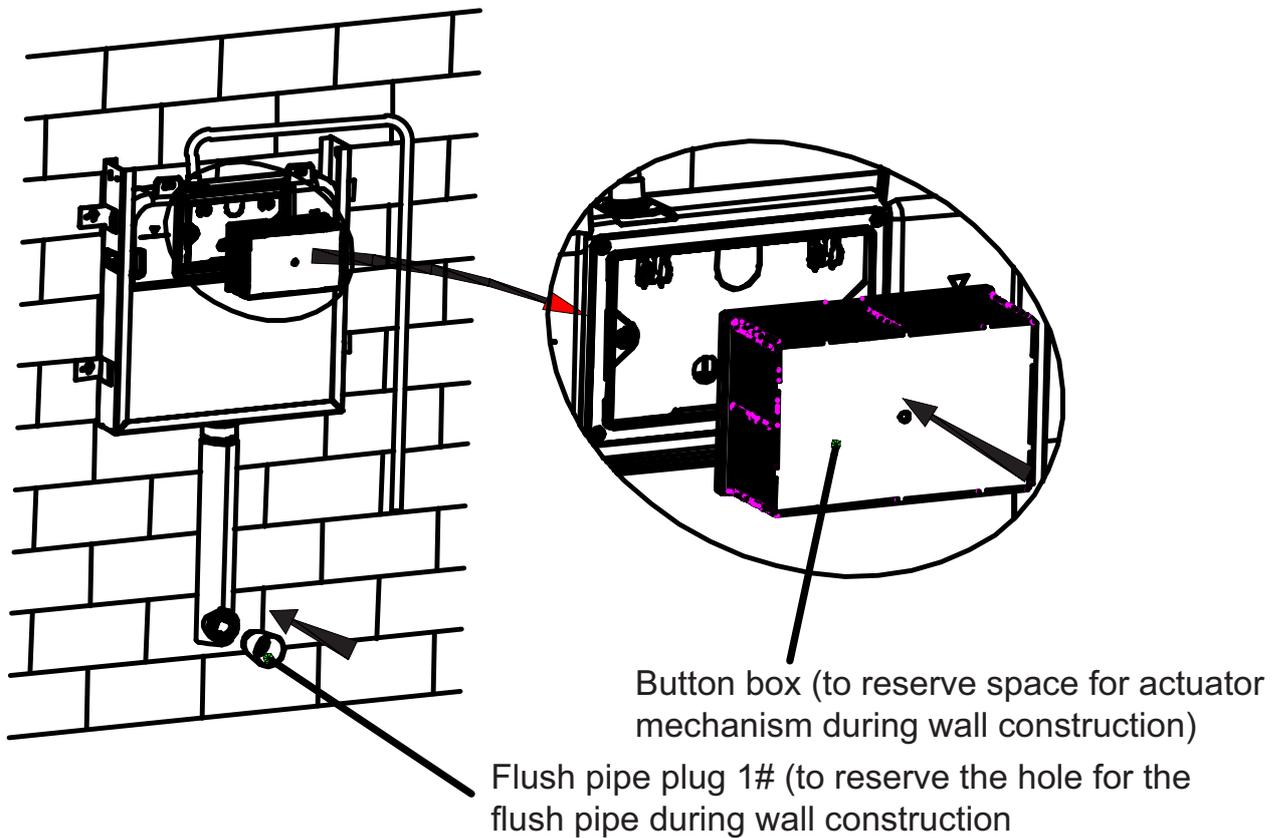


6. Wall thickness range 20-60mm (from frame outside surface to finished wall)

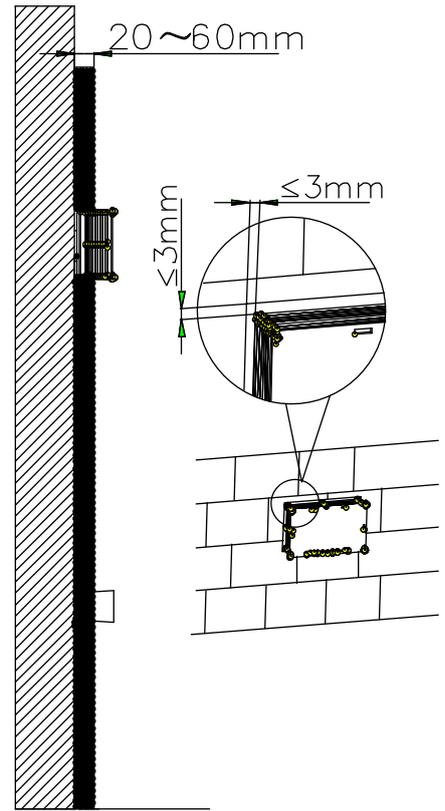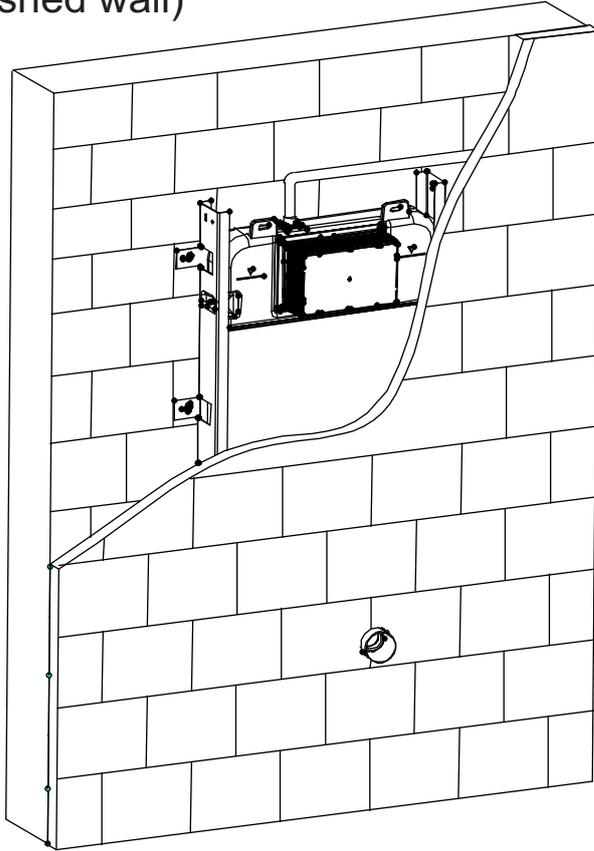

7. Installation of straight tube

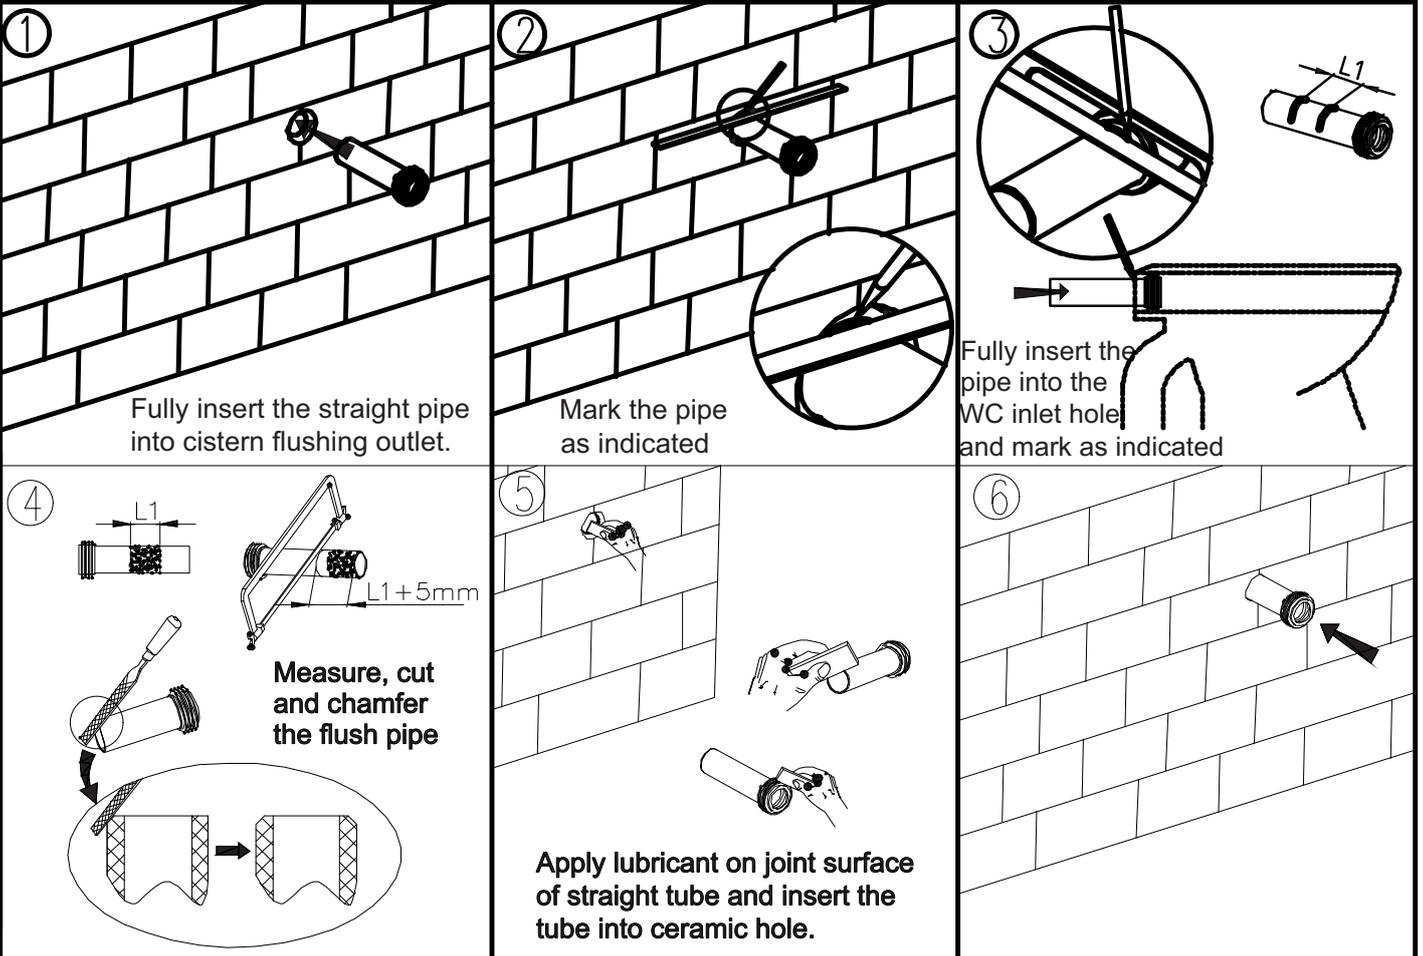

8. Internal flushing mechanism assembly drawing

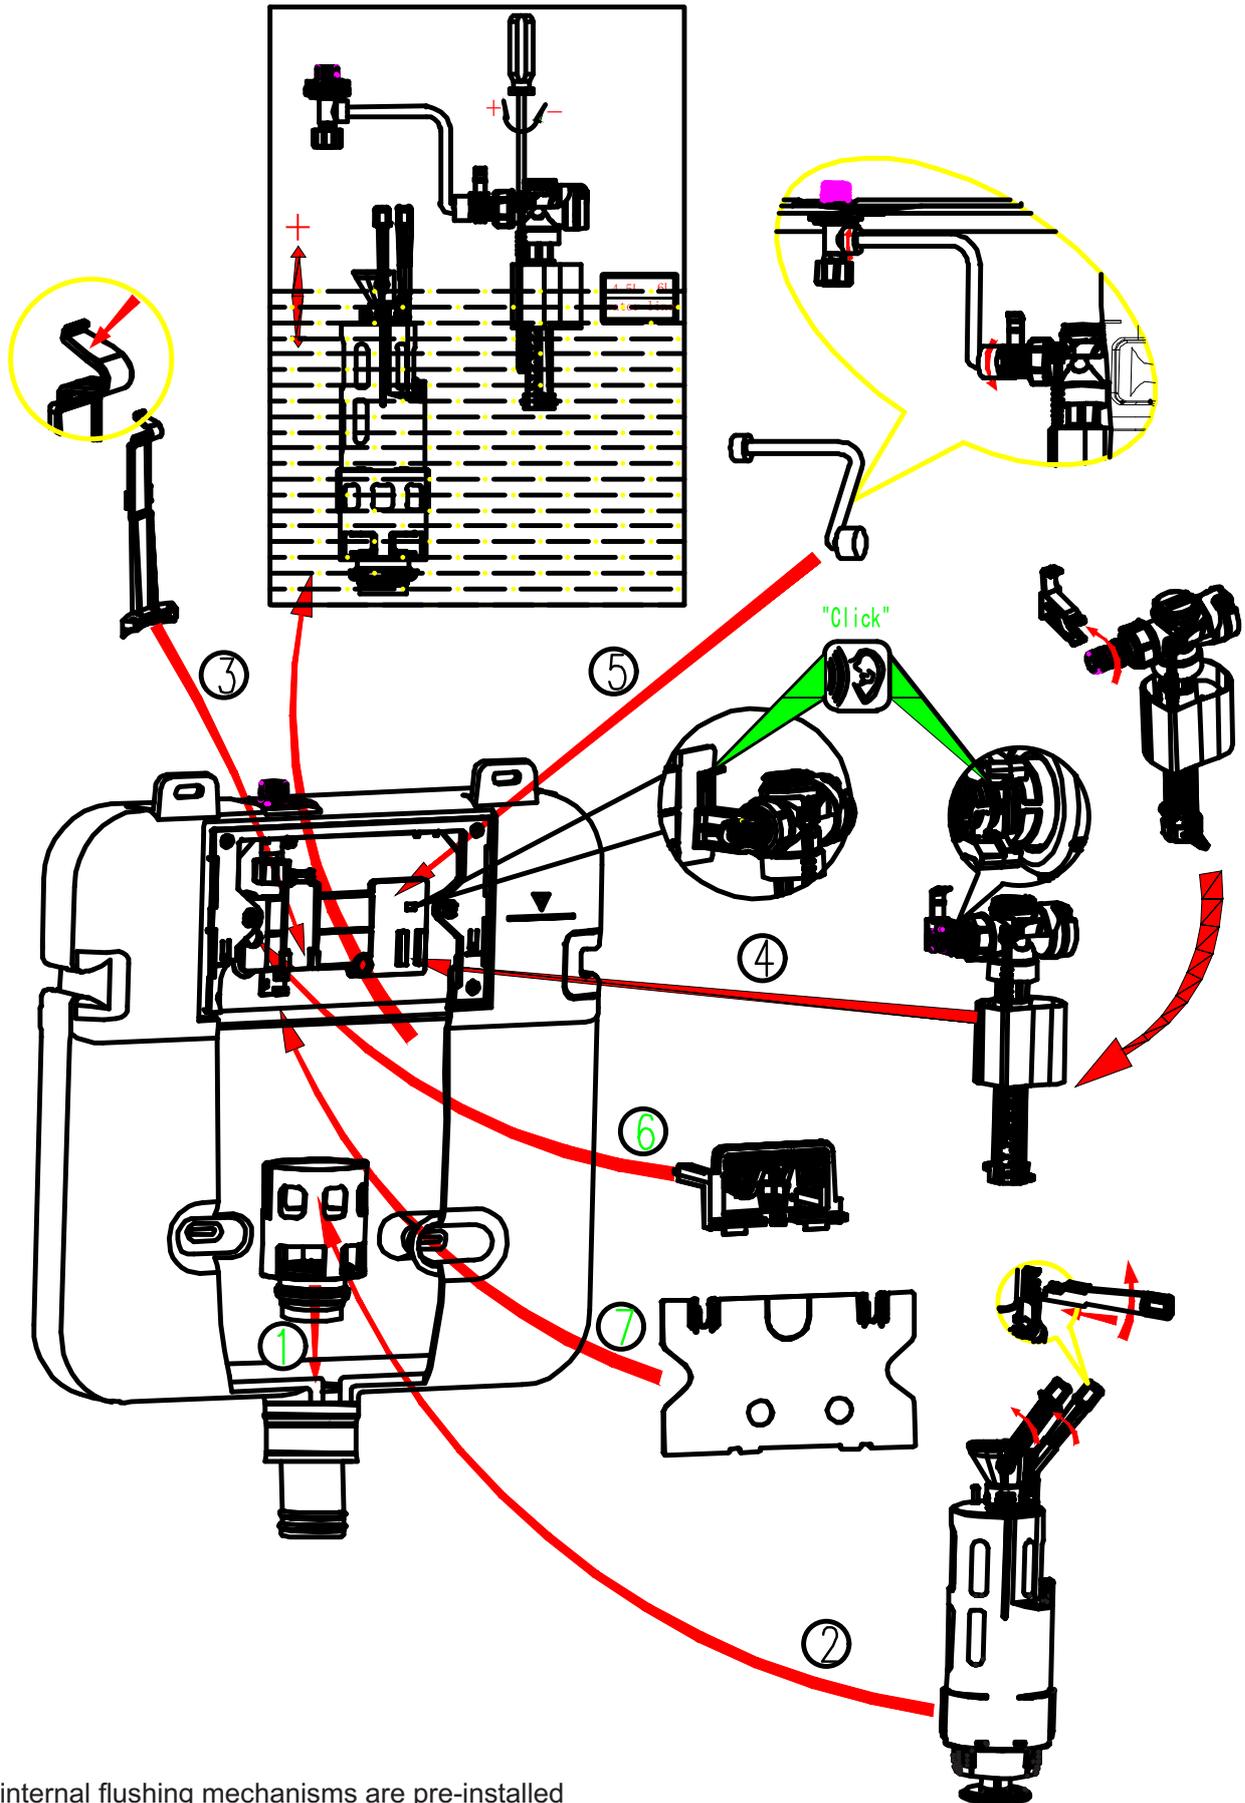

The internal flushing mechanisms are pre-installed the above diagram is for reference only.