


Mecca shower bracket with Air Shower II

SPECIFICATION

WELS RATING	3 STAR 9L/MIN
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1°C-MAX 75°C
PRESSURE RATING	MIN 150KPa-MAX 500KPa

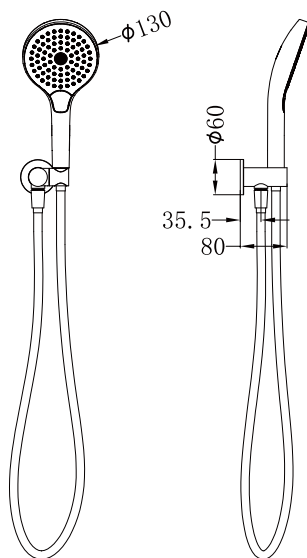

Dimensions are nominal measurements only.

AVAILABLE FINISH

	CHROME NR221905fCH		MATTE BLACK NR221905fMB
	BRUSHED NICKEL NR221905fBN		GUN METAL NR221905fGM
	BRUSHED GOLD NR221905fBG		BRUSHED BRONZE NR221905fBZ
	MATTE WHITE NR221905fMW		

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

PACKING INCLUDES

- 1x hand shower (built-in check valve)
- 1x shower bracket
- 1x 1.5m PVC hose



Versions: V1


Important

All products must be installed by licensed plumbers.

All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.




1. Apply thread sealant or teflon tape on outlet thread.



2. Pull back plate on together with bracket body.



3. Screw shower bracket body on to outlet. **DO NOT OVERTIGHTEN.** Slide the back plate against the wall/tile face properly.

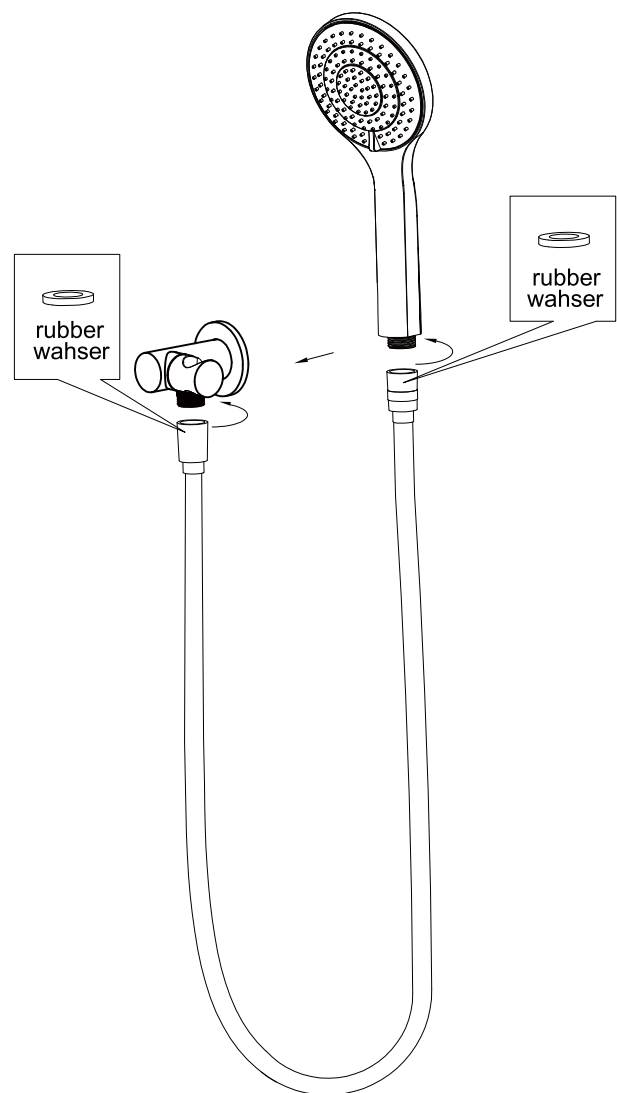

4. Connect bracket and hand shower with hose. **TEST & CHECK FOR LEAKS.**